



THALETEC

**Emaillierte Druckfilter mit
hydraulischer Öffnungsvorrichtung**

*Glass-lined pressure filters
with hydraulic opening device*

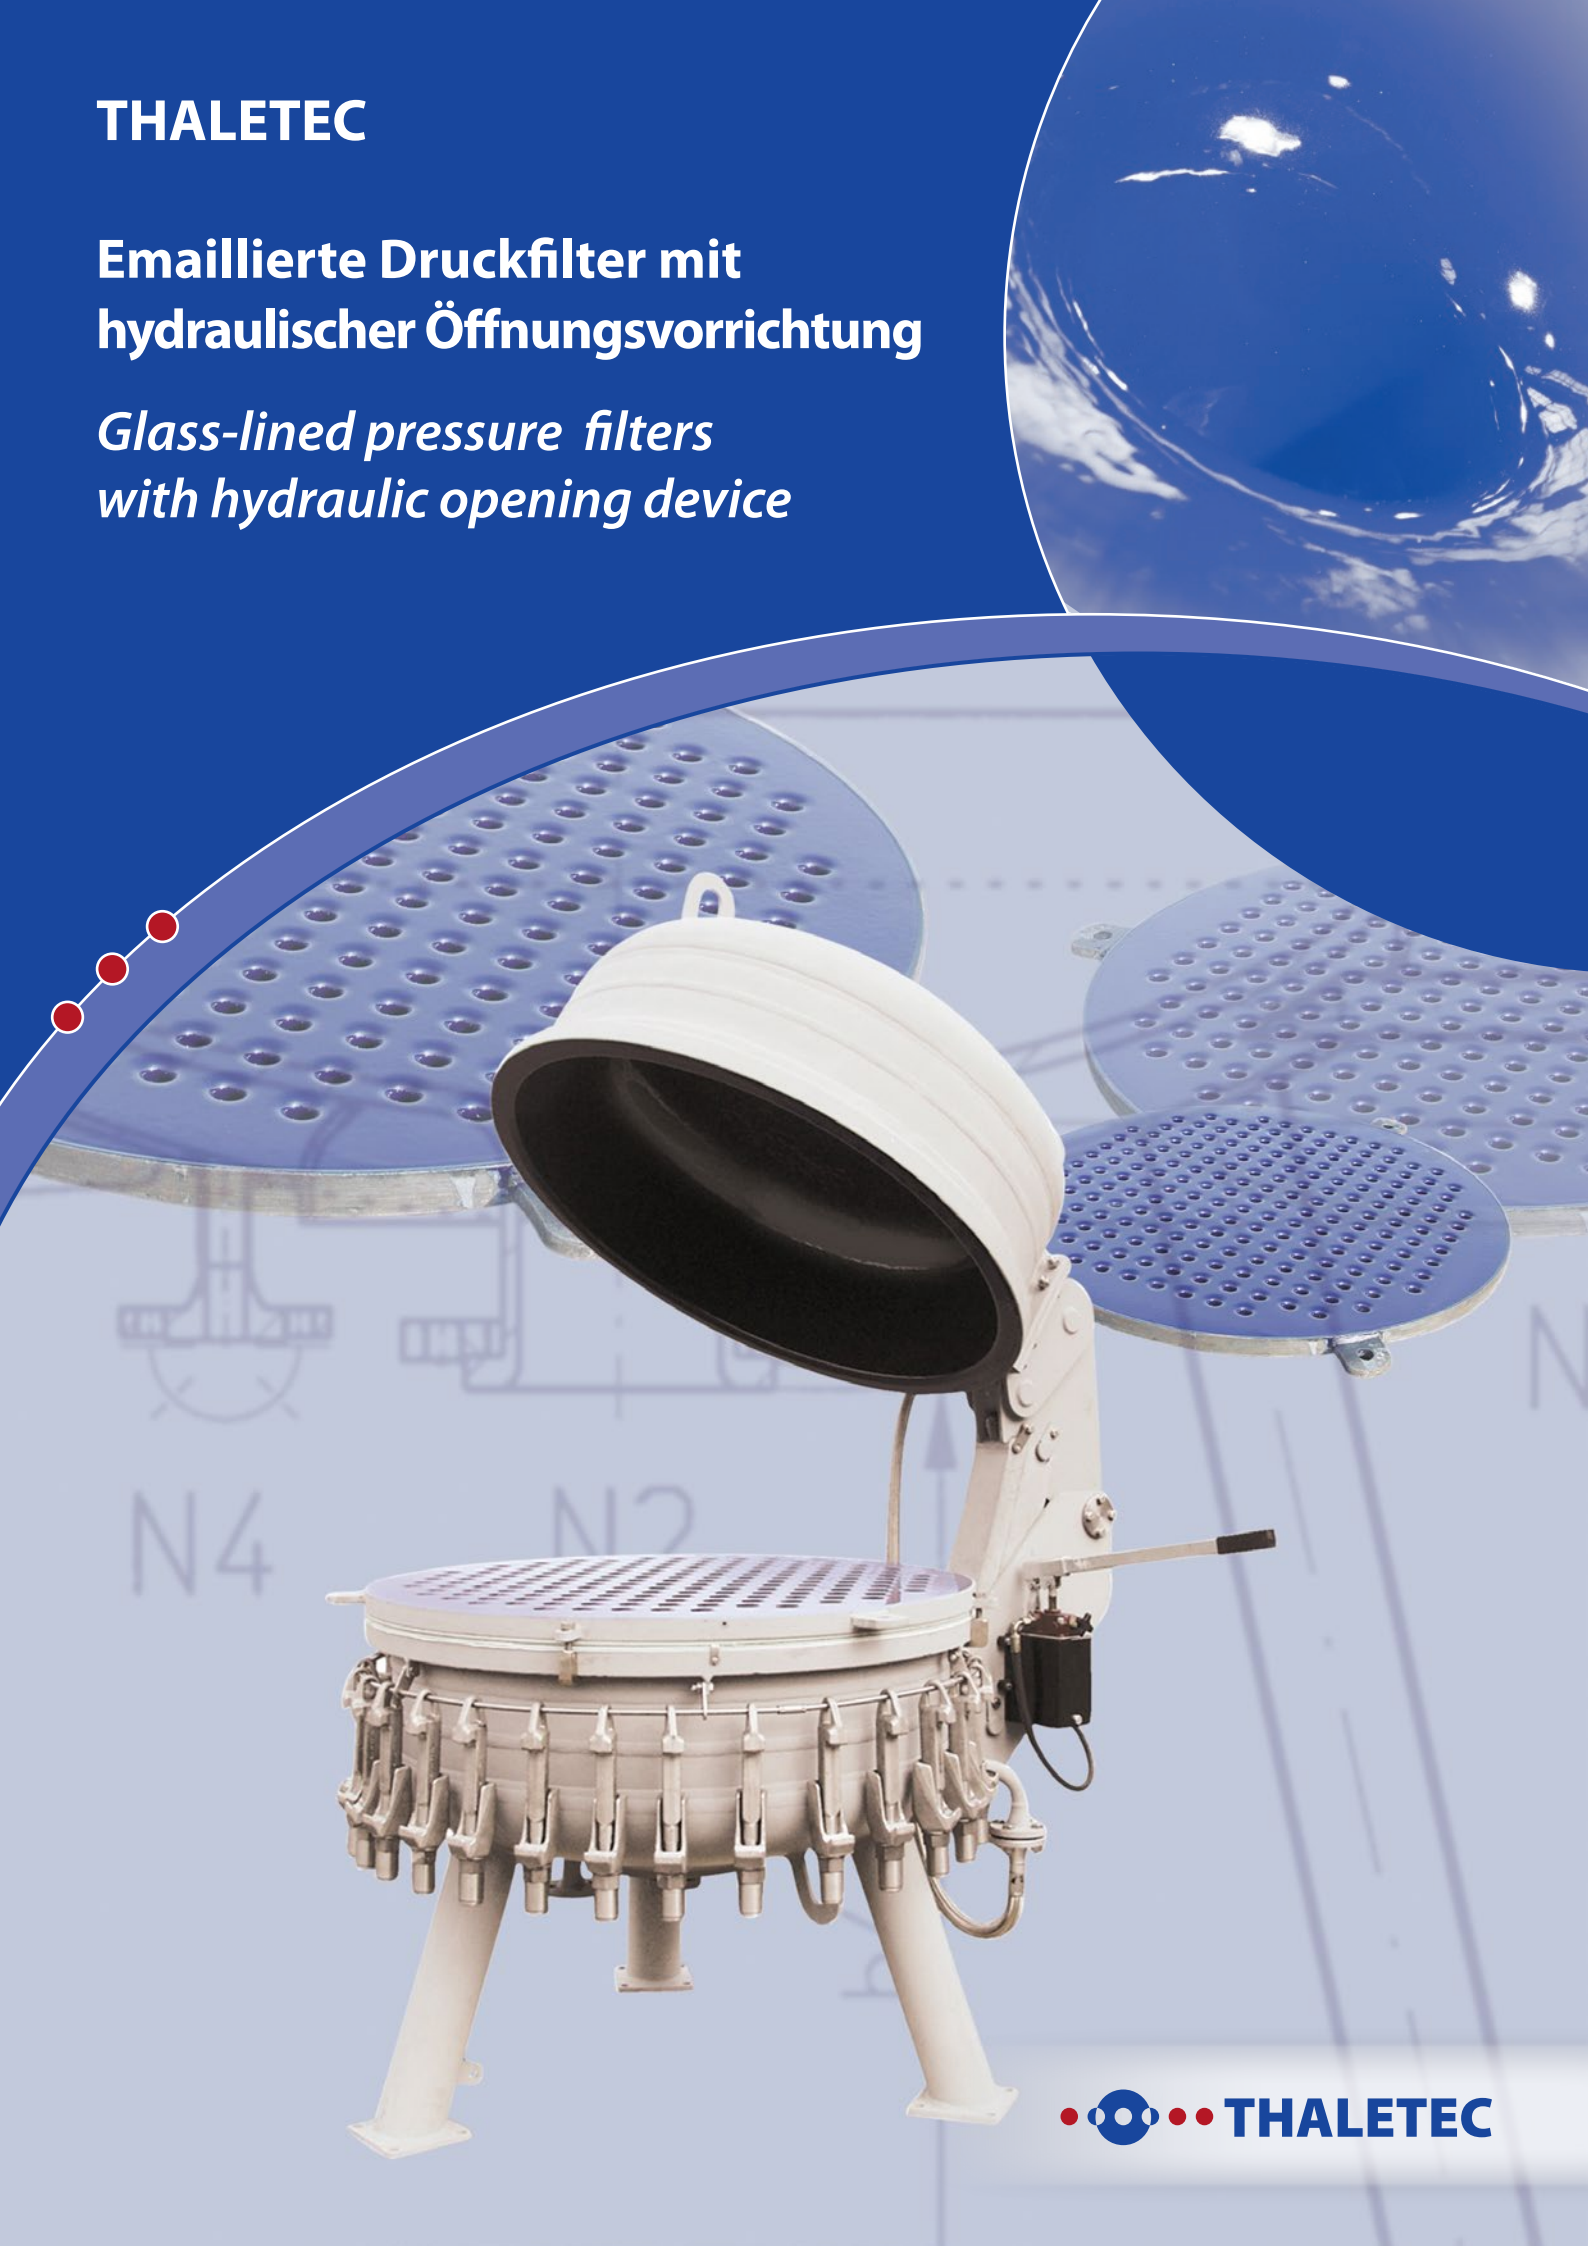

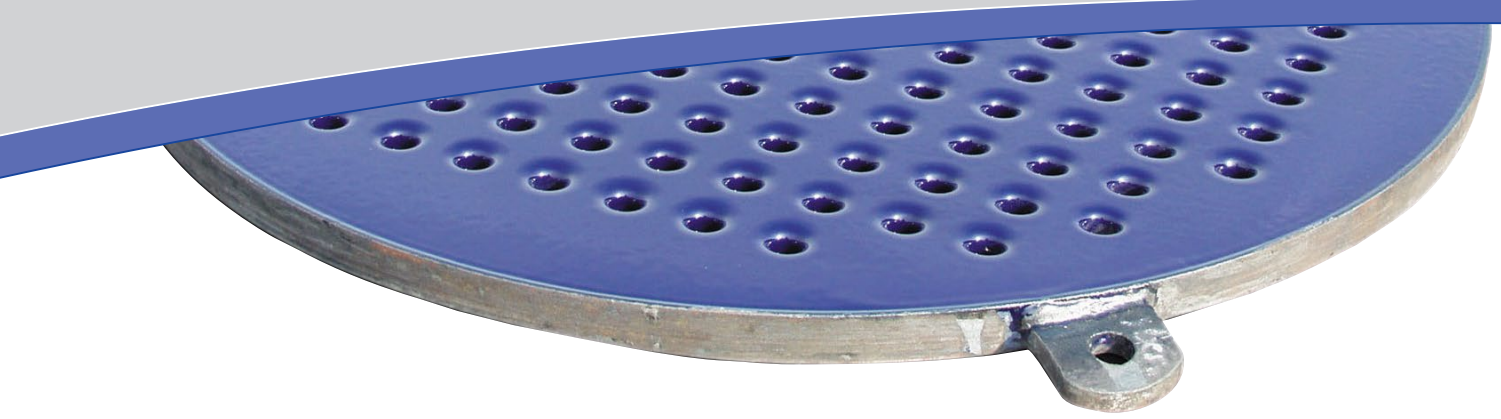

Beschreibung

Emaillierte Druckfilter von **THALETEC** sind kompakte und einfach handhabbare Apparate für viele korrosive oder hochreine Filtermedien. Eine chemisch hochbeständige Emaillierung sorgt für höchste Produktreinheit und eine lange Lebensdauer des Apparates. Eine handbetätigte hydraulische Öffnungsvorrichtung gewährleistet eine einfache und sichere Handhabung und Entleerung.

Selbstverständlich kann der Druckfilter exakt an die Anforderungen des Kunden angepasst werden.

Merkmale

- Hochwertige und hochbeständige Emaillierung nach ISO 28721-1
- Betriebsdruck bis 6 bar/Vakuum
- Optional mit Beheizung
- Filterfläche bis zu 0,8 m²
- Hydraulische Öffnungsvorrichtung ohne Fremdenergie
- Filterplatte aus emailliertem Stahl, Stahl PFA / PTFE-ummandelt oder Hastelloy

Vorteile

- Kompakter Apparat
- Einfache und sichere Bedienung
- Leichte Reinigung
- Hohe Flexibilität bezüglich der zu verwendenden Filtermaterialien
- Anpassung an spezielle Kundenanforderungen jederzeit möglich
- GMP-gerechte Ausführung möglich

Description

Glass-lined pressure filters made by **THALETEC** are compact and easy to handle apparatus for various corrosive or high purity filter media. The corrosion resistant glass-lining ensures highest product purity and a longer life time of the pressure filter. The manually operated hydraulic opening device guarantees an easy and safe handling and draining.

Of course, the pressure filter can be engineered and designed exactly to the requirements of our customers.

Characteristics

- Highly corrosion resistant glass-lining according to ISO 28721-1
- Operating pressure up to 6 bars/vacuum
- Optionally available with heating jacket
- Filter surface up to 0,8 m²
- Hydraulic opening device operated manually
- Filter plate made of glass-lined steel, steel PFA / PTFE or Hastelloy

Advantages

- Compact apparatus
- Easy and safe operation
- Easy cleaning
- High flexibility due to a large range of applicable filter materials
- Customization is always possible
- GMP design available



THALETEC GmbH

Steinbachstraße 3
D - 06502 Thale

☎ + 49 (0) 3947 778-0
🌐 + 49 (0) 3947 778-130

Hotline:

☎ + 49 (0) 3947 778-111
@ service@thaletec.com
🌐 www.thaletec.com

